



F SERIES


W1-2370S

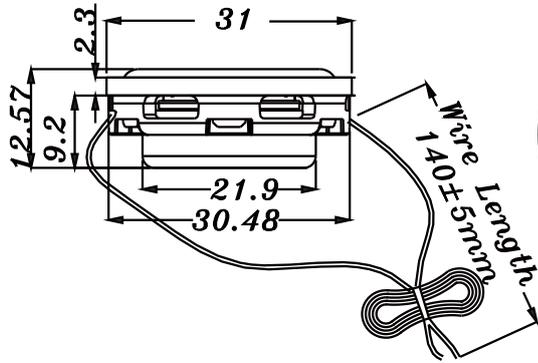

- EXTREMELY SLIM 1" FULL RANGE DRIVER, BUILT WITH MOST INNOVATIVE AND HIGHEST PERFORMANCE DESIGN
- 31mm OUTSIDE DIAMETER, $F_0:170\text{Hz}$
- ALUMINUM DIAPHRAGM, TPV SURROUND AND NEODYMIUM MAGNET SYSTEM
- BEST FOR LIMITED SPACE AND NEED GOOD SOUND APPLICATION

1" ALUM, FULL RANGE

DIAPHRAGM MTL	Aluminium
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.6 Ω
SENSITIVITY 1W/1m	78 dB
FREQUENCY RESPONSE	170-20K Hz
FREE AIR RESONANCE	170 Hz
VOICE COIL DIAMETER	16.4 mm
AIR GAP HEIGHT	1.5 mm
RATED POWER INPUT	2 W
MAXIMUM POWER INPUT	4 W
FORCE FACTOR, BL	1.54 TM
TYPE OF MAGNET	Neodymium
MOVING MASS	0.4 g
FERROFLUID ENHANCED	YES
SUSPENSION COMPLIANCE	2144 μMN^{-1}
EFFECTIVE PISTON AREA	0.00041 M^2
Levc	0.048 mH
Zo	14 Ω
X-max	1.0 mm
Vas	0.051 Litr
Qts	0.47
Qms	1.76
Qes	0.65

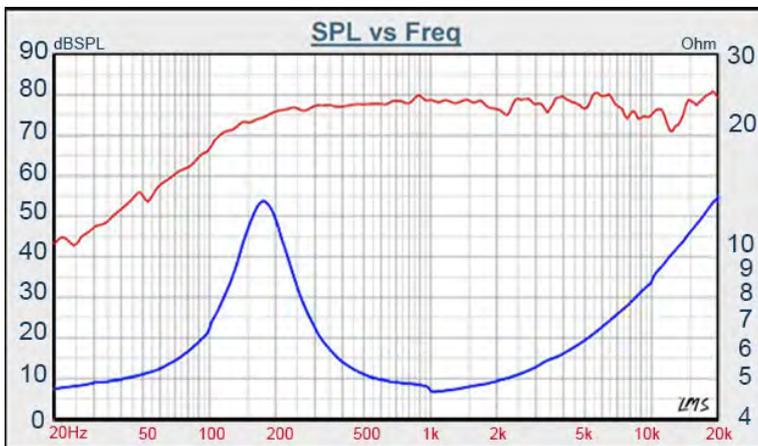

TB SPEAKERS

VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com